

Single Doors **296** | **305**

SINGLE POINT LOCKING

296 Reversible Panic Latch

Classification No.	3	7	6	B	1	3	2	2	A	A
EN 1125 : 2008										

The Exidor 296 is designed for single and double door applications. The unit is operated by a downward thrust of the cross bar to give a speedy exit in panic situations. An adapter for use with a rim cylinder for outside access is supplied as standard.

- Non-handed
- Fire rated for use on timber and steel doors
- Surface mounted
- Adapter supplied for operating with a rim cylinder
- Closed arm design

305 Panic Mortise Actuator with Cylinder Mortise Night Latch

Classification No.	3	7	6	0	1	3	2	2	A	A
EN 1125 : 2008										

The Exidor 305 offers a push bar actuator unit with a cylinder mortise night latch case that can be supplied with or without a Euro profile cylinder for access from the outside. A mortise plate is supplied as standard. The unit provides security on the outside with ease of escape from the inside in panic situations.

- Non-handed
- Surface mounted
- Closed arm design

BS EN 1125



MADE IN BRITAIN



305

296

Standard sizes

Standard size panic latches are suitable for single doors up to 1220mm wide. Special sizes are available on request.


Additional options:

The Exidor reversible panic latches can be supplied with:

- Steel door fixing (suffix 'SD' after the product code)
- Microswitch (suffix 'MS' after the product code)

Optional accessories for the 296 panic latch

- 322EA outside access device with Euro aperture
- 322EC outside access device with Euro cylinder

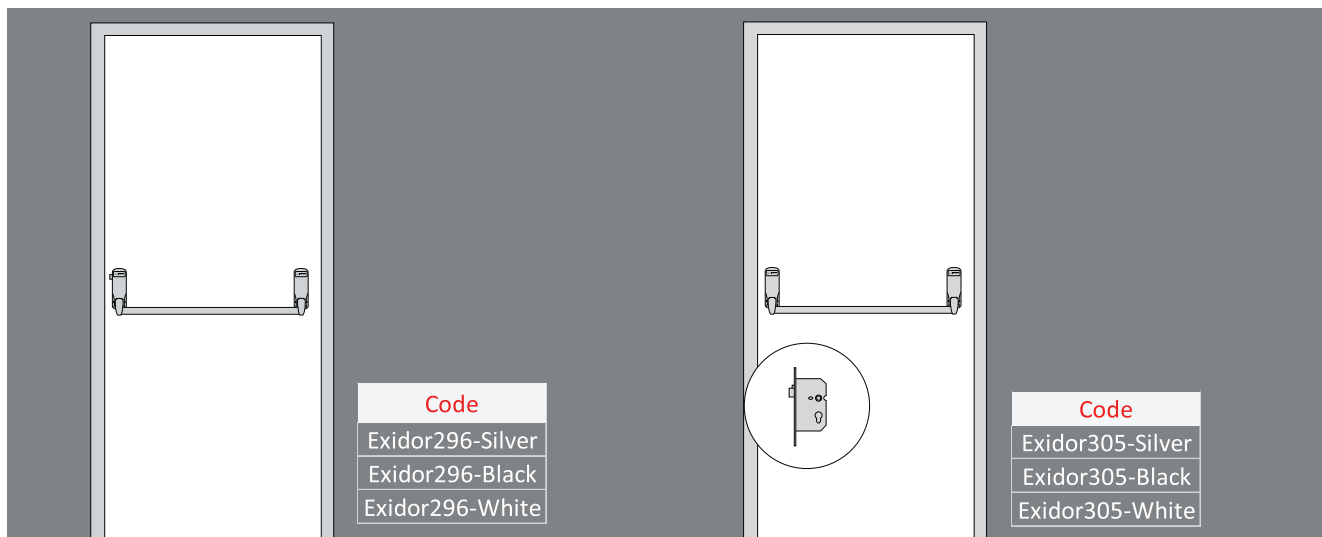

296

305

Code

- Exidor296-Silver
- Exidor296-Black
- Exidor296-White

Code

- Exidor305-Silver
- Exidor305-Black
- Exidor305-White

Single Doors 294 | 308 | 311

TWO POINT LOCKING

294 Single Panic Bolt

Classification No.	3	7	6	B	1	3	2	2	A	A
EN 1125 : 2008										

The Exidor 294 is an elegant and highly functional panic bolt for single and double door applications. Incorporated as standard is an automatic top trip and easy clean floor socket. The main body is fitted with an anti-thrust device, which prevents leverage of both the top and bottom shoot bolts from their sockets.

- Non-handed
- Fire rated for use on timber and steel doors
- Surface mounted
- Closed arm design

308 Single Panic Bolt with Horizontal Pullman Latches

Classification No.	3	7	6	B	1	3	2	2	A	A
EN 1125 : 2008										

The Exidor 308 offers all the elegance and function of an Exidor single panic bolt with the added feature of horizontal pullman latches which increases the security and offers a smooth latching action.

- Non-handed
- Surface mounted
- Closed arm design

311 Single Panic Bolt with Vertical Pullman Latches

Classification No.	3	7	6	B	1	3	2	2	A	A
EN 1125 : 2008										


The Exidor 311 offers all the elegance and function of an Exidor single panic bolt with the added feature of vertical Pullman latches which increases the security and offers a smooth latching action.

- Non-handed
- Fire rated for use on timber and steel door
- Surface mounted
- Closed arm design

Horizontal Pullman Latches



Vertical Pullman Latches

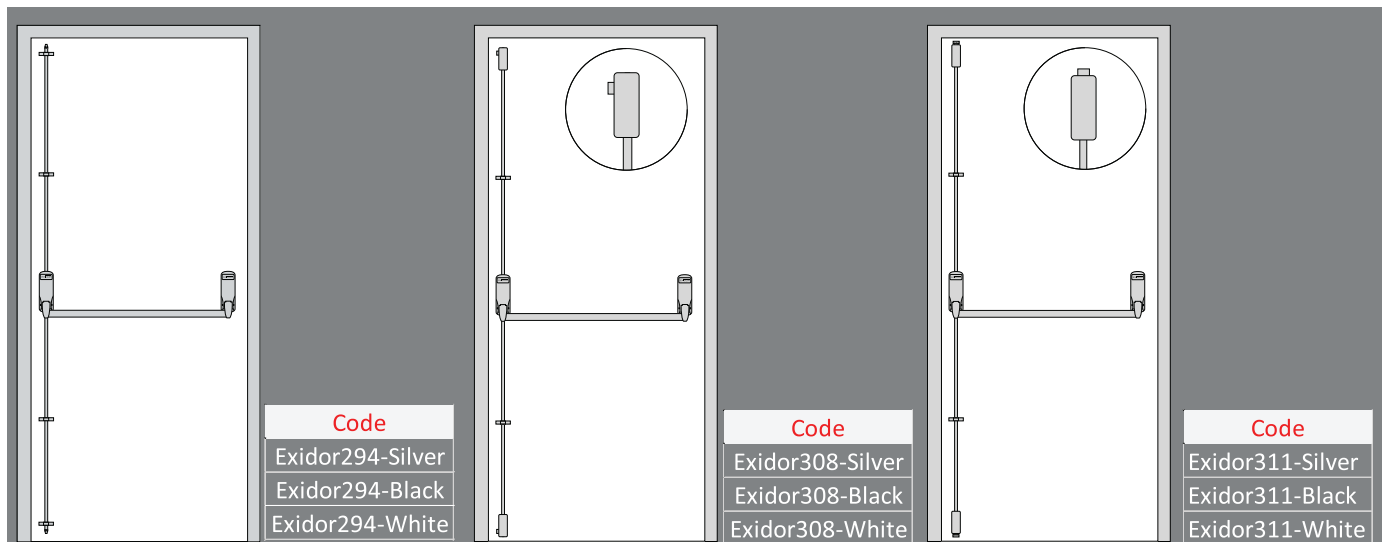

294 / 294A

308

311

BS EN 1125



Standard sizes

Standard size panic bolts are suitable for single doors up to 1220mm wide and 2440mm high. Special sizes are available on request.

Additional options:

The Exidor reversible panic bolts can be supplied with:

- Adjustable shoots (suffix 'A' after product code-294 only)
- Steel door fixing (suffix 'SD' after the product code)
- Microswitch (suffix 'MS' after the product code)

Optional accessories for the 296 panic latch

- 322EC outside access device with Euro cylinder
- 304 Exit alarm
- 299 dogging device