

Astragals

Meeting Stile Seals for Frameless Glass Door

RP43Si (self adhesive)



A silicon smoke seal specially designed for frameless & metal framed glazed stacked sliding doors. The silicon fin forms an effective weather, energy, ambient and medium temperature smoke seal. Two pieces of RP43Si are used to make the seal.

LOCATION

Between panels of frameless & metal framed glazed sliding doors.

MIN/MAX GAP

30m to 50mm (prior to installation).

SEAL MATERIAL

Silicon Rubber (SE)

FIXING METHOD

Adhesive double sided tape.



Note: contact surface must be clean, smooth and if patned, well cured. Self adhesive seals will not adhere to oiled or alkyd finishes or to easy clean wash and wear paint surfaces.

STANDARD FINISH

Anodised Satin Clear.

STANDARD LENGTH

3000mm

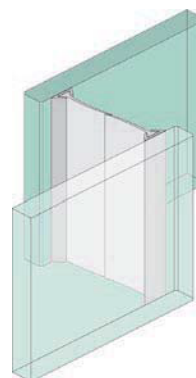

Astragals

Meeting Stile Seals for Frameless Glass Door

RP105 (self adhesive)



A weather and energy seal specially designed for frameless & metal framed glazed stacked sliding doors. The polymer fin forms an effective weather and energy seal. Two pieces of RP105 are used to make the seal.

LOCATION

Between panels of frameless & metal framed glazed sliding doors.

MIN/MAX GAP

15mm to 28mm (prior to installation).

SEAL MATERIAL

Clear polymer seal

FIXING METHOD

Adhesive double sided tape.



Note: contact surface must be clean, smooth and if patned, well cured. Self adhesive seals will not adhere to oiled or alkyd finishes or to easy clean wash and wear paint surfaces.

STANDARD FINISH

Translucent

STANDARD LENGTH

3000mm

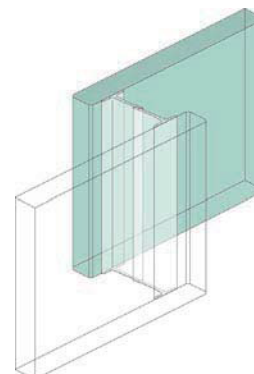

Astragals Meeting Stile Seals for Frameless Glass Door

RP42, RP103, RP104



Clear polycarbonate astragal and perimeter seals specifically designed for frameless glass doors. The woven pile sealing strip is combined with a weather fin to form an effective weather and energy seal.

Use in conjunction with Raven brush strip door bottom seals RP2b, RP74 and threshold plates.

Location:

RP42 Meeting stiles of 15mm thick frameless glass doors.

RP103 Meeting stiles of 10mm thick frameless glass doors.

RP104 Meeting stiles of 12mm thick frameless glass doors.

Min/Max Gap: 7mm to 8mm (prior to installation).

Fixing: Self adhesive.

Note: Contact surface must be clean, smooth and if painted, well cured.


Seal: Clear high impact UV stabilised polycarbonate body with black polypropylene pile with weather fin.

Sizes: 3000mm.


Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

RP42



RP103



RP104

